

Reduces noise coming through tile floors and walls

QuietTile is a sound damping elastomeric adhesive for use on ceramic, glass and stone tile and on porous surfaces such as wood and backer board. Formulated to reduce impact noise on tiles, QuietTile also protects floors from cracks and fractures.

QuietTile Benefits


- Non-toxic, water-soluble, ultra-low VOCs
- Typical tile floor impact noise reduction of 6dB to 12dB
- Easily applied with a trowel
- Protects tiles from cracks and fractures
- Environmentally friendly, lab tested

Product Specifications

Model:	QuietTile 373
Appearance:	White paste
pH:	8.0 - 9.0
Weight:	Wet - 11.2 lbs/gallon Dry - 8.4 lbs/gallon
Solid content:	>72 wt %
Viscosity:	300,000 centipoise
Compliance:	Ultra-low VOCs
Thickness:	1/16"
Drying time:	72 hours
Coverage:	40 - 80 sqft/gallon
Storage temp:	40° F - 100° F Do not freeze



Less Noise with QuietTile

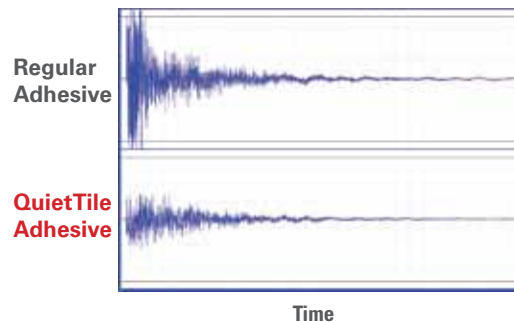

Product Application

No mixing required.

Surfaces must be consistently flat and firmly fixed. Clean off dust, oil, grease and all loose contaminating materials. Ensure surfaces are dry before tiling, with no residue.

Use a V-notched trowel to spread the adhesive, ensuring it does not skin prior to bedding the tiles. Press and slide the tile at right angles to the notch pattern to ensure 100% coverage on the back of the tile.

Applications

- Multifamily
- Commercial
- Bathrooms
- Kitchens
- Foyers